

Product Specifications

OPERATING PERFORMANCE

Operating Weight - Mono Boom	8,465 kg
Operating Weight - 2-Piece Boom	8,780 kg
Bucket Capacity (Heaped)	0.245 m ³
Slew Speed	10.3 min ⁻¹
Travel Speed	
1st	2.6 km/h
2nd	5.0 km/h
Gradeability	35°
Ground Pressure - Mono Boom	37.9 kPa
Ground Pressure - 2-Piece Boom	39.3 kPa
Maximum Bucket Breakout Force	59.1 kN
Maximum Arm Digging Force	40.0 kN
Traction Force	88.0 kN
Boom Swing Angle (Left/Right)	70° / 60°

ENGINE

Model	Yanmar / 4TNV98T
Rated Output (ISO 14396)	51.6 kW / 2,000 min ⁻¹
Maximum Torque	302.0 Nm / 1,475 min ⁻¹
Displacement	3,318 ml
Alternator	12 V - 0.96 kW
Battery (IEC 60095-1)	12 V - 72 A·h

FLUID CAPACITY

Engine Lubrication	10.2 L
Cooling System	14.0 L
Fuel Tank Capacity	128.0 L
Hydraulic Reservoir Capacity	73.0 L
Hydraulic System Capacity	140.0 L

HYDRAULIC SYSTEM

P1	Variable Displacement Pump
Flow Rate	160.0 L/min
Relief Pressure	27.5 MPa
P2	Gear Pump
Flow Rate	60.6 L/min
Hydraulic Pressure	24.0 MPa
Service Port 1	
Flow Rate	100.0 L/min
Hydraulic Pressure	20.6 MPa
Service Port 2	
Flow Rate	55.0 L/min
Hydraulic Pressure	20.6 MPa
Service Port 3	
Hydraulic Pressure	20.6 MPa
Service Port 4	
Flow Rate	55.0 L/min
Hydraulic Pressure	20.6 MPa

SAFETY and HEALTH

Vibration Levels	
Hand / Arm	≤ 2.5 m/s ²
Body	≤ 0.5 m/s ²
Noise Level	
Sound Power Level	LWA 99 dB



Multi-Informational Display



Hydraulic Joystick Controls





Auxiliary Hydraulic Lines





Multi-Function Switch Bank

TB285 Machine Dimensions

Mono Boom

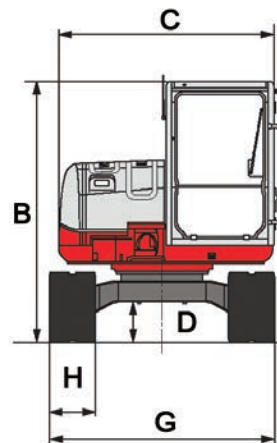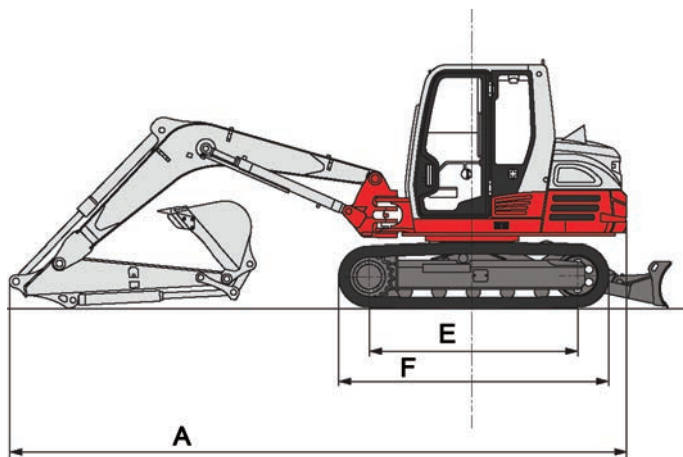


2 Piece Boom

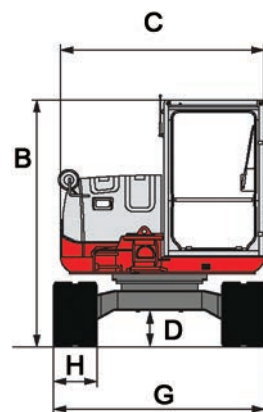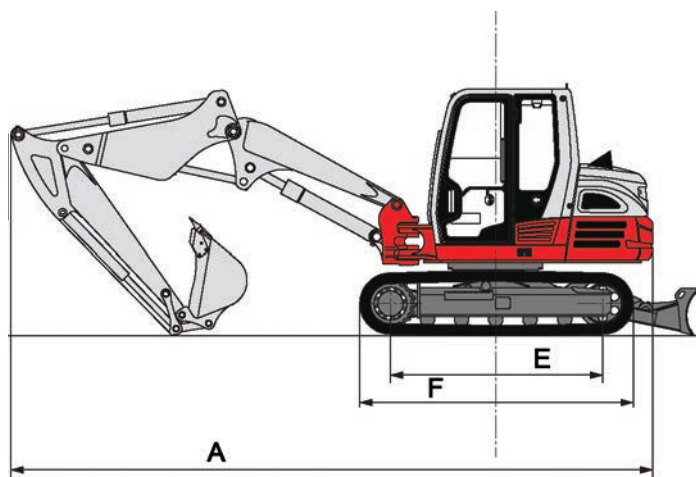


MACHINE DIMENSIONS	Mono Boom			2-Piece Boom
	1,780 mm ARM	1,960 mm ARM	2,130 mm ARM	
A Overall Length	6,530 mm	6,575 mm	6,660 mm	6,700 mm
B Overall Height	2,550 mm	2,550 mm	2,550 mm	2,550 mm
C Upper Structure Overall Width	2,140 mm	2,140 mm	2,140 mm	2,140 mm
D Ground Clearance	370 mm	370 mm	370 mm	370 mm
E Crawler Base	2,210 mm	2,210 mm	2,210 mm	2,210 mm
F Crawler Overall Length	2,855 mm	2,855 mm	2,855 mm	2,855 mm
G Crawler Overall Width	2,200 mm	2,200 mm	2,200 mm	2,200 mm
H Crawler Shoe Width (Rubber)	450 mm	450 mm	450 mm	450 mm

TB285 Operating Dimensions

Mono Boom

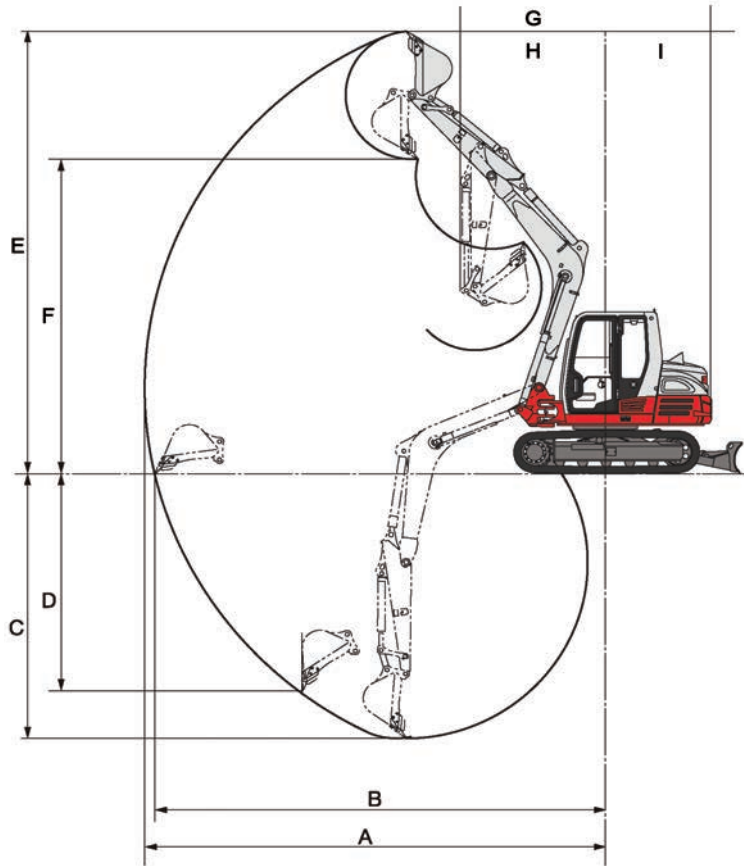

2 Piece Boom

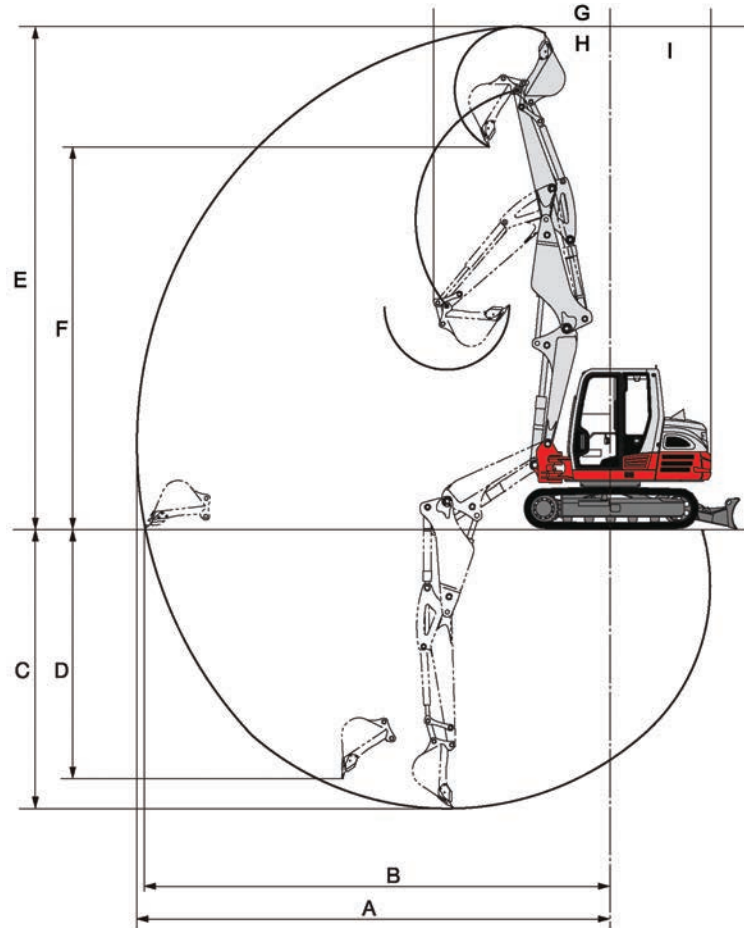

MACHINE DIMENSIONS	Mono Boom			2-Piece Boom
	1,780 mm ARM	1,960 mm ARM	2,130 mm ARM	
A Maximum Reach	7,105 mm	7,275 mm	7,435 mm	7,730 mm
B Maximum Reach at Ground Level	6,950 mm	7,125 mm	7,290 mm	7,595 mm
C Maximum Digging Depth	4,230 mm	4,410 mm	4,580 mm	4,480 mm
D Maximum Vertical Digging Depth	3,470 mm	3,650 mm	3,820 mm	3,990 mm
E Maximum Height of Cutting Edge	7,030 mm	7,165 mm	7,290 mm	8,035 mm
F Maximum Dumping Height	4,995 mm	5,135 mm	5,260 mm	6,110 mm
G Front Swing Radius	2,240 mm	2,360 mm	2,495 mm	2,675 mm
H Front Swing Radius with Boom Offset	1,810 mm	1,910 mm	2,030 mm	2,190 mm
I Slew Radius	1,650 mm	1,650 mm	1,650 mm	1,650 mm

© 2017 Takeuchi MFG. Co., Ltd. All Rights Reserved. In accordance with our established policy of continued improvement, specifications and features are subject to change without notice. Pictures may show options other than standard equipment.

TAKEUCHI
From World First to World Leader