

OPERATING PERFORMANCE	Serial No. 126000002 or later	Serial No. 126100003 or later
Operating Weight - Cab	5,735 kg	
Operating Weight - Canopy	N/A	5,500 kg
Bucket Capacity (Heaped)	0.168 m ³	
Slew Speed	9.4 min ⁻¹	
Travel Speed		
1st	2.8 km/h	
2nd	4.9 km/h	
Gradeability	30°	
Ground Pressure - Cab	31.5 kPa	
Ground Pressure - Canopy	N/A	30.2 kPa
Maximum Bucket Breakout Force	43.2 kN	
Maximum Arm Digging Force (1,620 mm Arm)	27.3 kN	
Maximum Arm Digging Force (1,780 mm Arm)	25.6 kN	
Traction Force	66.9 kN	
Boom Swing Angle (Left/Right)	78° / 55°	

ENGINE		
Model	Yanmar 4TNV84T	Yanmar 4TNV86CT
Rated Output (ISO 14396)	34.3 kW / 2,400 min ⁻¹	35.5 kW / 2,400 min ⁻¹
Maximum Torque	160.8 Nm 1,700 min ⁻¹	177.0 Nm 1,560 min ⁻¹
Displacement	1,995 ml 2,091 ml	
Alternator	12 V - 0.66 kW	
Battery (IEC 60095-1)	12 V - 90 A·h	

FLUID CAPACITY	
Engine Lubrication	7.4 L
Cooling System	11.0 L
Fuel Tank Capacity	81.0 L
Hydraulic Reservoir Capacity	49.0 L
Hydraulic System Capacity	90.0 L

HYDRAULIC SYSTEM	Serial No. 126000002 or later	Serial No. 126100003 or later
P1, P2	Variable Displacement Pump	
Flow Rate	58.3 L/min	
Relief Pressure	24.0 MPa	
P3	Gear Pump	
Flow Rate	43.9 L/min	
Relief Pressure	20.6 MPa	
Service Port 1		
Flow Rate	102.2 L/min	
Hydraulic Pressure	20.6 MPa	
Service Port 2		
Flow Rate	43.9 L/min	
Hydraulic Pressure	20.6 MPa	
Service Port 3		
Hydraulic Pressure	20.6 MPa	
Service Port 4		
Flow Rate	43.9 L/min	
Hydraulic Pressure	20.6 MPa	


SAFETY and HEALTH		
Vibration Levels		
Hand / Arm	≤ 2.5 m/s ²	
Body	≤ 0.5 m/s ²	
Noise Level		
Sound Power Level	L _{WA} 97 dB	



Hydraulic Joystick Controls



Multi-Informational Display

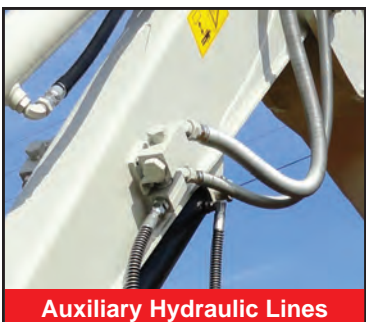


Auxiliary Hydraulic Lines



Multi-Function Switch Bank

TB260 Compact Excavator

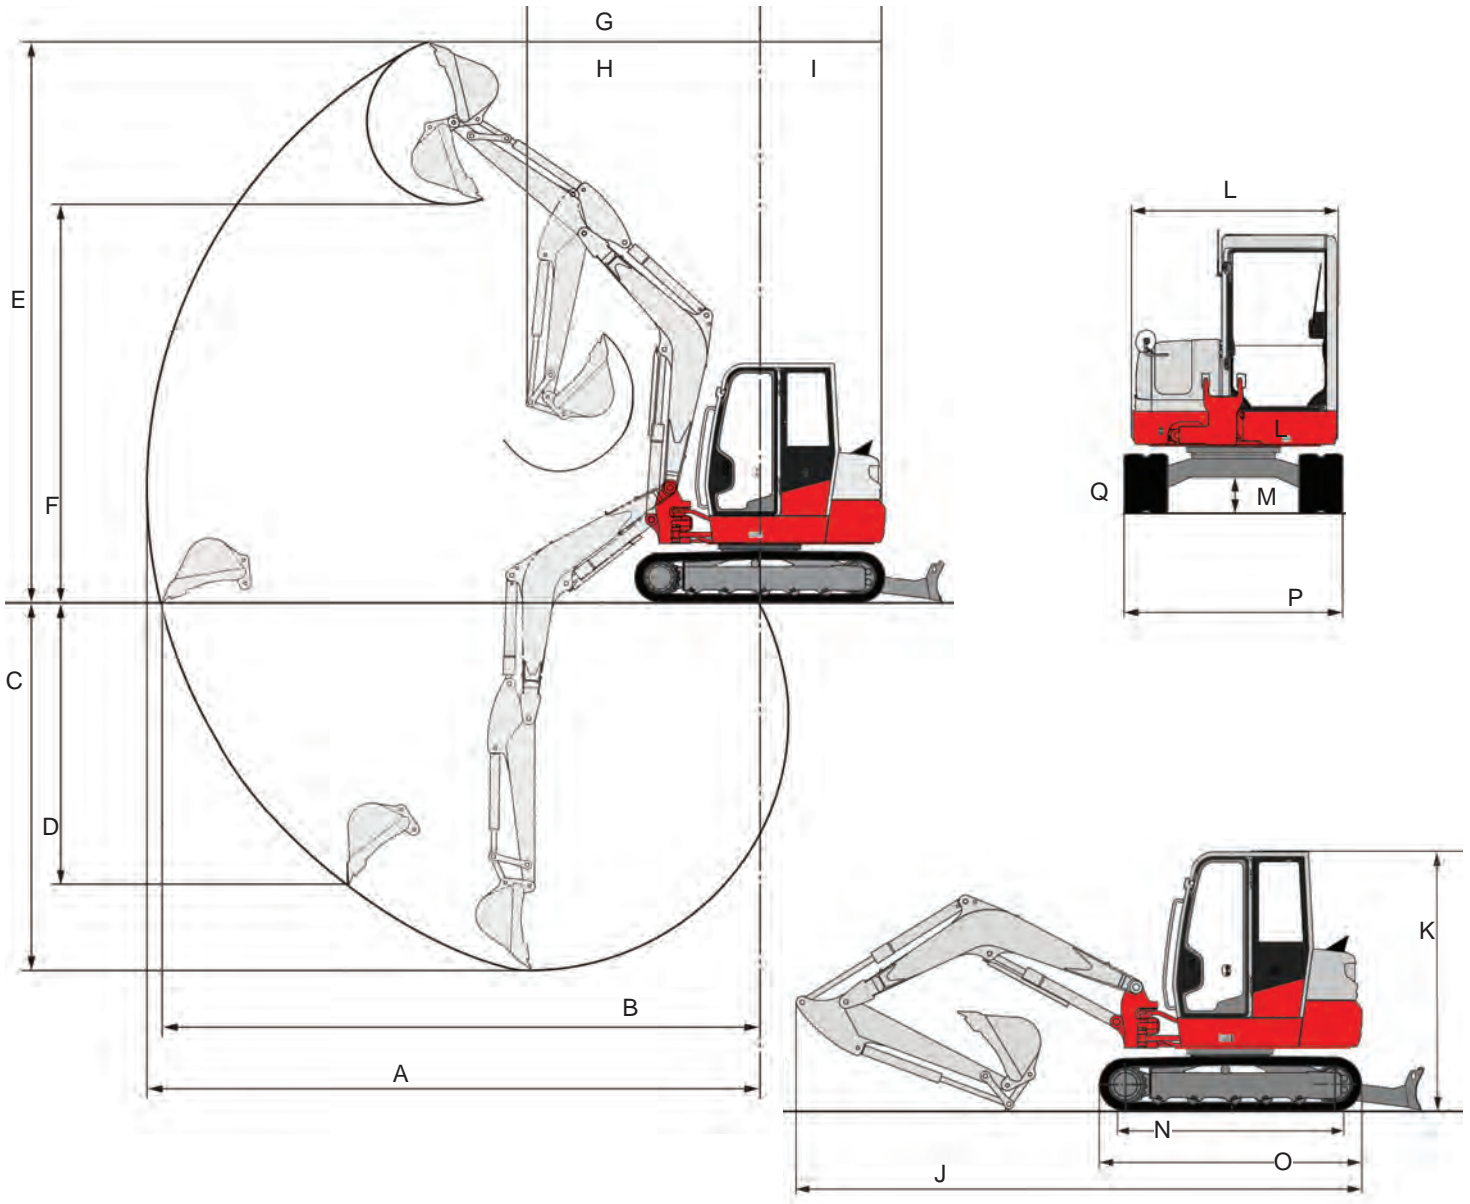

MACHINE DIMENSIONS	1,620 mm ARM	1,780 mm ARM
A Maximum Reach	6,120 mm	6,270 mm
B Maximum Reach at Ground Level	5,975 mm	6,130 mm
C Maximum Digging Depth	3,735 mm	3,895 mm
D Maximum Vertical Digging Depth	2,830 mm	2,980 mm
E Maximum Height of Cutting Edge	5,835 mm	5,940 mm
F Maximum Dumping Height	4,115 mm	4,220 mm
G Front Swing Radius	2,390 mm	2,420 mm
H Front Swing Radius with Boom Offset	1,945 mm	1,975 mm
I Slew Radius		1,300 mm
J Overall Length	5,540 mm	5,550 mm
K Overall Height (Cab / Canopy)		2,560 mm / 2,575 mm
L Upper Structure Overall Width		1,870 mm
M Ground Clearance		330 mm
N Crawler Base		2,050 mm
O Crawler Overall Length		2,575 mm
P Crawler Overall Width		2,000 mm
Q Crawler Shoe Width		400 mm